


Specifications 40AM Eng. 01-08-17

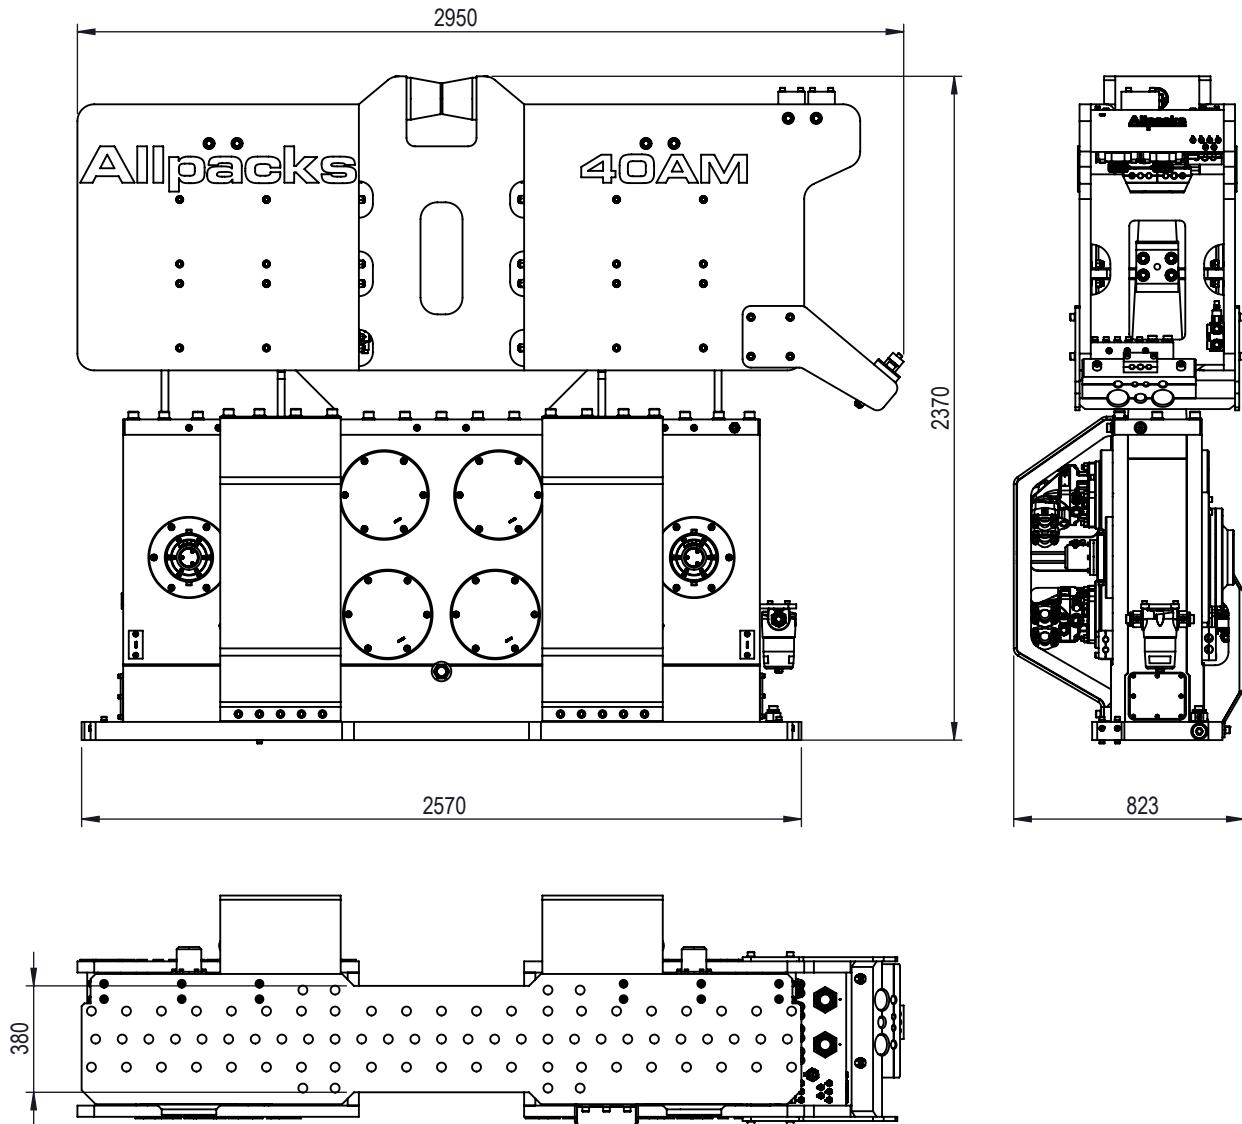

### Specifications

<b>Eccentric moment</b>	<b>0-40</b>	<b>kgm</b>
<b>Frequency</b>	<b>2200</b>	<b>rpm</b>
<b>Centrifugal force</b>	<b>2123</b>	<b>kN</b>
<b>Dynamic weight</b>	<b>4600</b>	<b>kg</b>
<b>Amplitude</b>	<b>22.2</b>	<b>mm</b>
<b>Amplitude incl. clamp</b>	<b>13.1</b>	<b>mm</b>
<b>Max. Static line-pull</b>	<b>500</b>	<b>kN</b>
<b>Max. Operating pressure</b>	<b>350</b>	<b>bar</b>
<b>Max. Oil flow</b>	<b>987</b>	<b>l/min</b>
<b>Total weight w.o. clamp</b>	<b>8260</b>	<b>kg</b>

### Clamps

<b>Universal Weight</b>	<b>350UC</b> <b>2530 kg</b>
<b>Caisson Weight</b>	<b>2x 165CC</b> <b>2x 1.600 kg</b>

### Powerpack

<b>Type Weight</b>	<b>1000VH</b> <b>12500 kg</b>
--------------------	----------------------------------