


Specifications 24AM Eng. 01-08-17

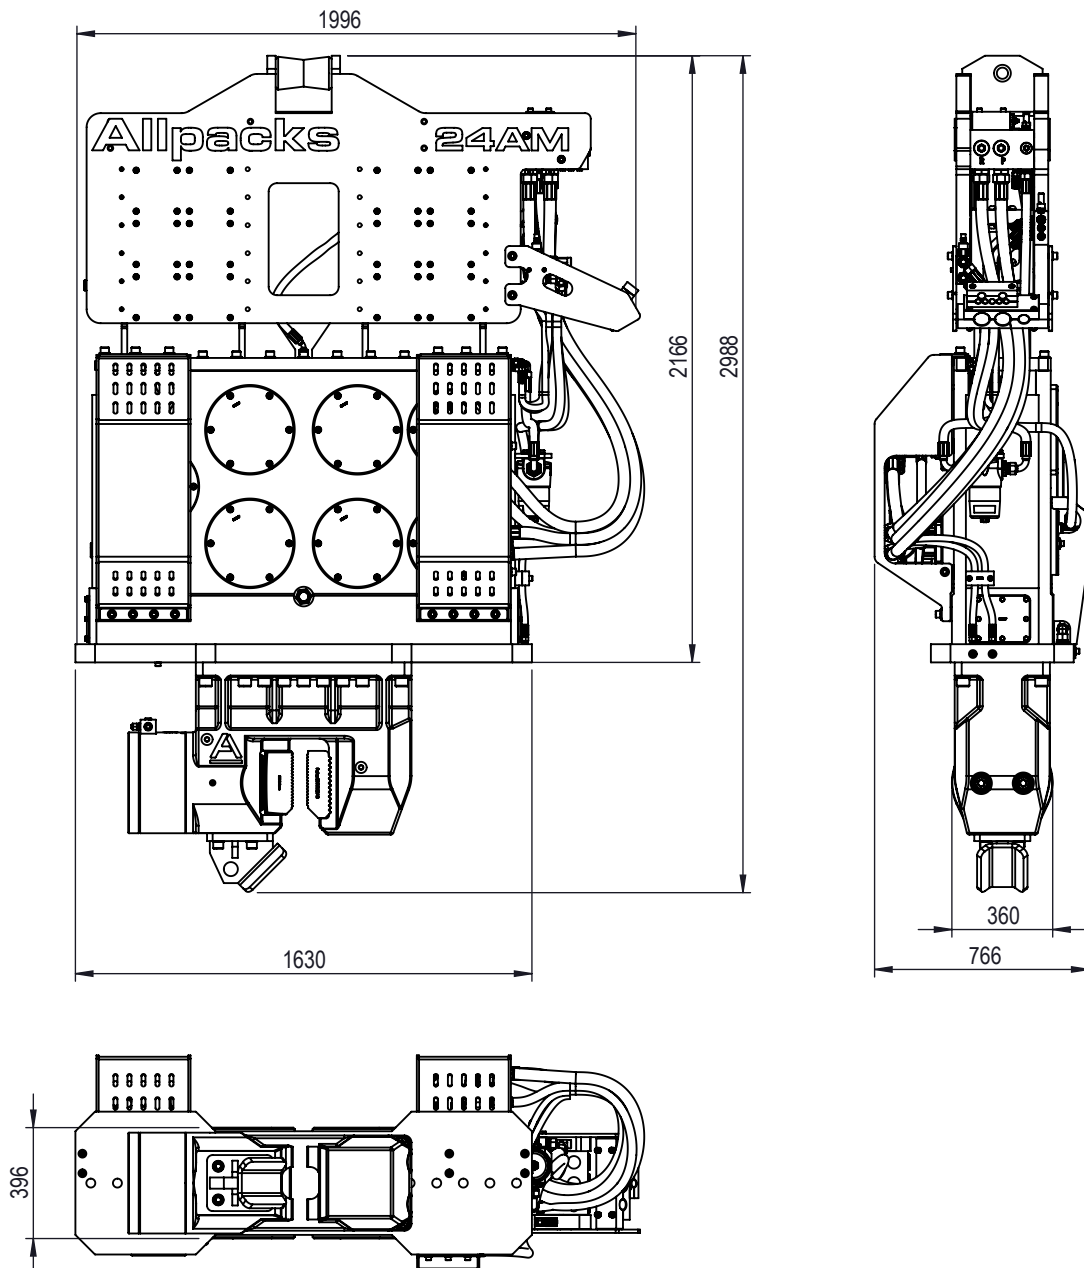

## Specifications

<b>Eccentric moment</b>	<b>0-24</b>	<b>kgm</b>
<b>Frequency</b>	<b>2200</b>	<b>rpm</b>
<b>Centrifugal force</b>	<b>1274</b>	<b>kN</b>
<b>Dynamic weight</b>	<b>3173</b>	<b>kg</b>
<b>Amplitude</b>	<b>15.1</b>	<b>mm</b>
<b>Amplitude incl. clamp</b>	<b>11.2</b>	<b>mm</b>
<b>Max. Static line-pull</b>	<b>360</b>	<b>kN</b>
<b>Max. Operating pressure</b>	<b>350</b>	<b>bar</b>
<b>Max. Oil flow</b>	<b>607</b>	<b>l/min</b>
<b>Total weight w.o. clamp</b>	<b>5450</b>	<b>kg</b>

## Clamps

<b>Universal Weight</b>	<b>165UC</b> <b>1100 kg</b>
<b>Caisson Weight</b>	<b>2x 81CC</b> <b>2x 700 kg</b>

## Powerpack

<b>Type Weight</b>	<b>600VH</b> <b>7800 kg</b>
--------------------	--------------------------------